


Zvierajúce čelúste - zvýšené

Označenie	Hmotnosť	Nosnosť	ISO 2328	A	B	C
HX 18T	448 kg	1800 kg/500 mm	2	460/1780 mm	1050 mm	750 mm
HX 22T	465 kg	2200 kg/500 mm	2	420/1840 mm	1150 mm	750 mm

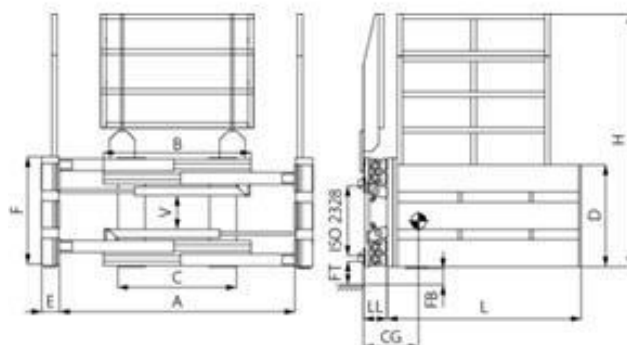

Zvierajúce čelúste s otočnými pogumovanými čelúšťami

Označenie	Hmotnosť	Nosnosť	ISO 2328	A	B	Min. šírka nosiča vidlíc
HOX 18-A0-105	447 kg	1600 kg/500 mm	2	490/1810 mm	1050 mm	750 mm
HOX 18-A0-105B	451 kg	1600 kg/500 mm	2	490/1810 mm	1050 mm	750 mm
HOX 18-A0-115	462 kg	1600 kg/500 mm	2	490/1810 mm	1050 mm	750 mm
HOX 18-A0-115B	371 kg	1600 kg/500 mm	2	490/1810 mm	1050 mm	750 mm
HOX 18-A0-125	472 kg	1600 kg/500 mm	2	490/1810 mm	1050 mm	750 mm
HOX 18-A0-125B	480 kg	1600 kg/500 mm	2	490/1810 mm	1050 mm	750 mm

